

# Defining an Effective and Green Wireless-Link Packet Scheduler through a Modular Architecture

**Carlo Augusto Grazia**

Department of Engineering *Enzo Ferrari*  
University of Modena and Reggio Emilia

Modena, 15 October 2013

**Workshop SFINGI**

Software routers to Improve Next-Generation Internet (PRIN 2009)

# Talk overview

- 1 Introduction
  - Problem
  - State of the Art
- 2 Proposed solution
  - Modular Architecture
  - Benefits
- 3 TEMPEST tool
  - Test Environment
  - Reference Scenario
- 4 HFS, the new packet scheduler
- 5 Conclusions and Future Works

# Problem

## what

to provide features over a wireless link

- throughput boosting and energy saving
- QoS guarantees

## why

radio channels are unreliable

- burst channel error (multipath, fading, interference, noise, ecc...)
- user mobility

## where

packet scheduler

# State of the Art

typical solution

single **integrated** scheduler

weaknesses

- merge both QoS guarantees and wireless link issues
  - QoS → IP level
  - link issues → MAC/PHY level
- high-quality schedulers for wired links are unusable without modifications
- different technology or solution means to modify (again) the scheduler

## Proposed solution 1/3 *MAC-SAL Scheduling&Abstraction Layer*


### modular architecture

extends the network stack by adding a special **middle layer** on top of the MAC (decouple QoS and throughput problems)

### bottom side

deals with the idiosyncrasies of the wireless link

- transmission reliability
- throughput boost using channel state information
- energy saving

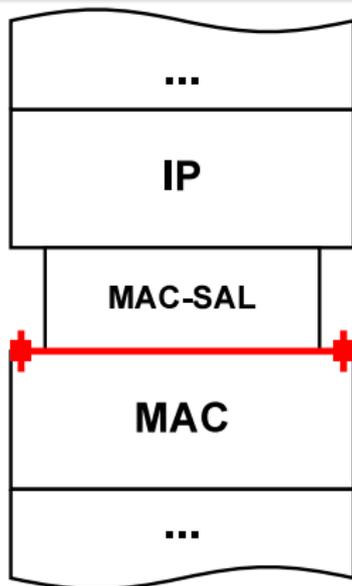

## Proposed solution 2/3 MAC-SAL *Scheduling&Abstraction Layer*


### modular architecture

extends the network stack by adding a special **middle layer** on top of the MAC (decouple QoS and throughput problems)

### top side

exports the abstraction of a link

- function *link\_ready()*
- transparency for IP layer
- avoid cross-layering (IP-level)

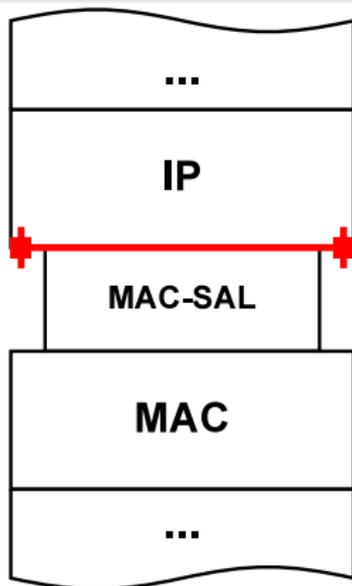

## Proposed solution 3/3 *MAC-SAL Scheduling & Abstraction Layer*


modular architecture

extends the network stack by adding a special **middle layer** on top of the MAC (decouple QoS and throughput problems)


internally

MAC-SAL layer scheduler


- shared buffer with **M** virtual queues
- buffer size equal to **Q** packets

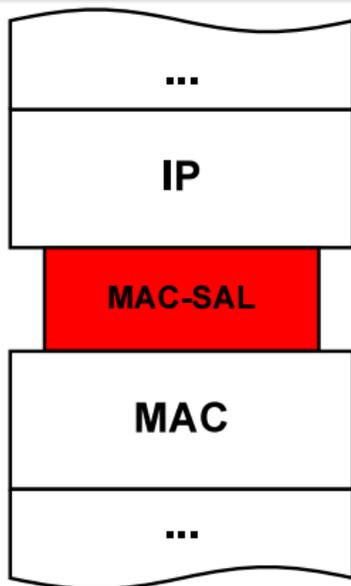

# Architecture: double scheduler

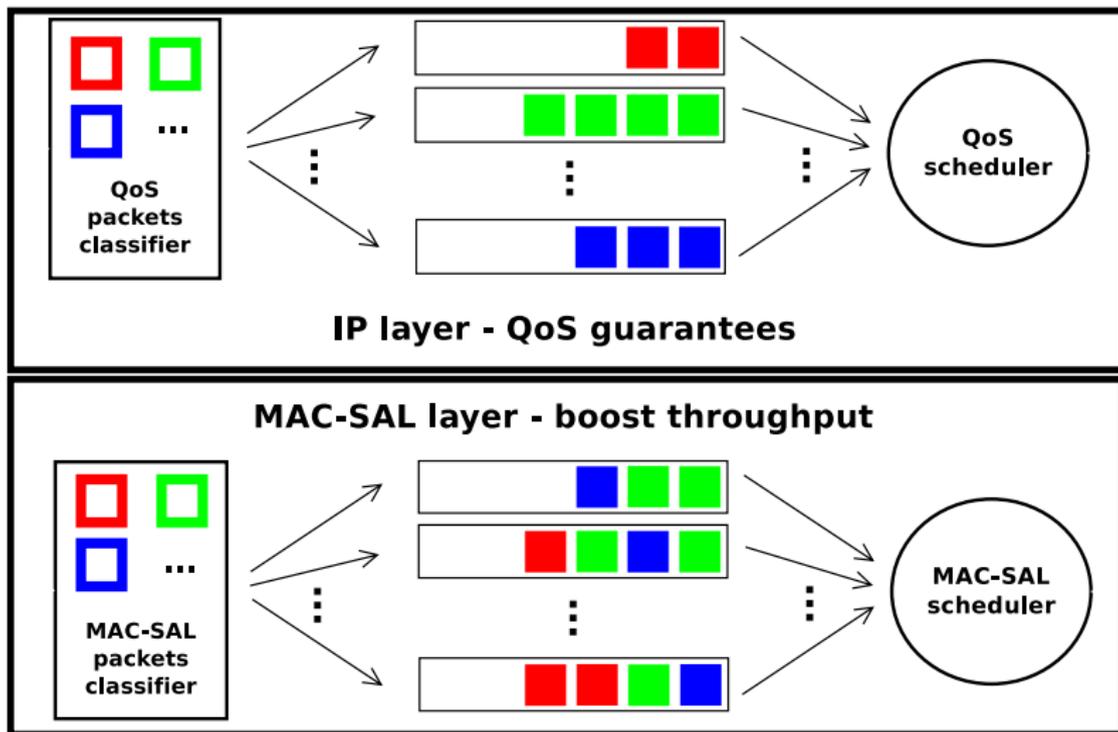

# Architecture: double scheduler

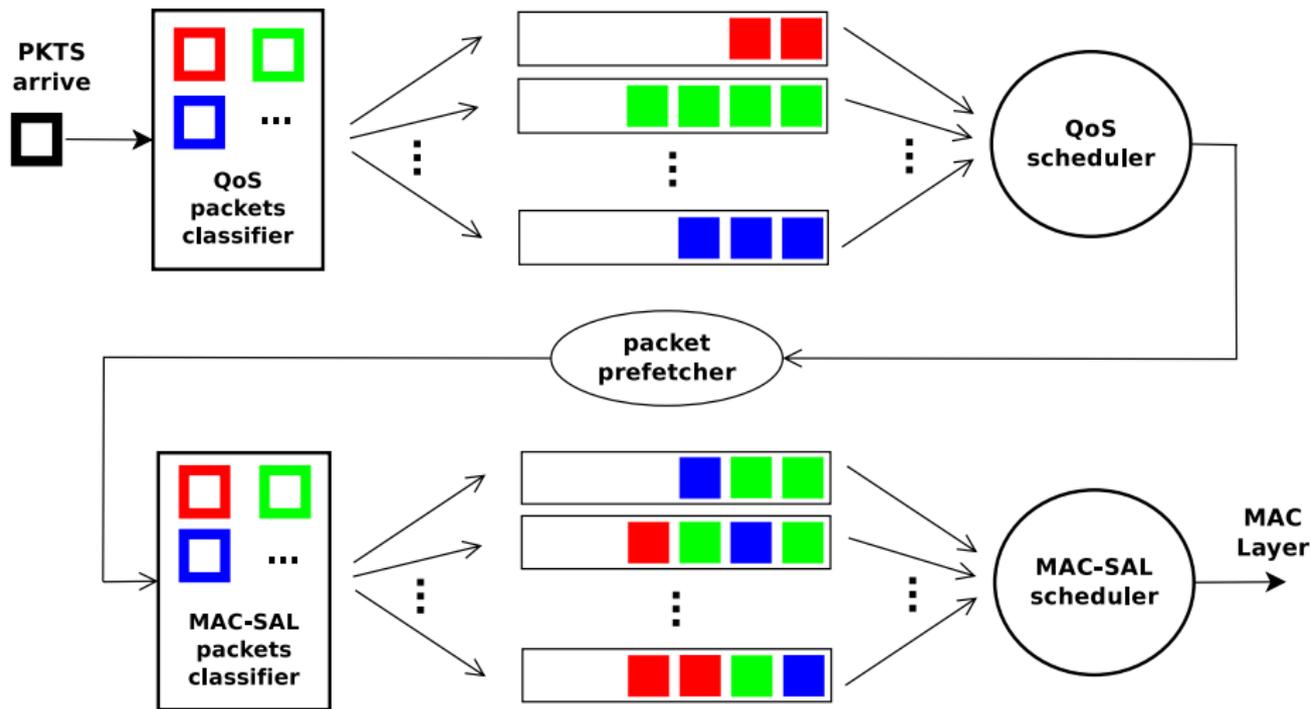

# Benefits

- 1 for QoS guarantees, existing packet schedulers for wired links can be used without modification
- 2 the same packet scheduler can be used
  - on heterogeneous wireless technologies
  - with different solutions to boost the throughput
  - only values/parameters of MAC-SAL scheduler change
- 3 high throughput through *cross-layering*, while still preserving *flexibility*


## Test EnvironMent for Performance Evaluation of the Scheduling of packeTs

- UNIX-based open tool
- simulate both wired and wireless environment
- possibility to execute *original* scheduler alone or plugged into a *double* scheduler
  - different schedulers available by default
  - easy to add new schedulers
- performance measured
  - execution time
  - energy consumption
  - throughput
  - queueing delay, B-WFI, T-WFI, RFI


## Test Environment for Performance Evaluation of the Scheduling of packets

- schedulers used:
  - WF<sup>2</sup>Q+: optimal service guarantees,  $O(\log n)$  cost
  - DRR:  $O(n)$  deviation from optimal service,  $O(1)$  cost
  - QFQ+: quasi-optimal service guarantees, execution time close to DRR
  - W<sup>2</sup>F<sup>2</sup>Q: best integrated scheduler with  $O(n)$  cost
- easy run-time configuration
  - single/double scheduler mode
  - number of flows (QoS and/or MAC-SAL), weight distribution
  - Q buffer size
  - realistic packets arrival pattern

# Test Environment: classic configuration

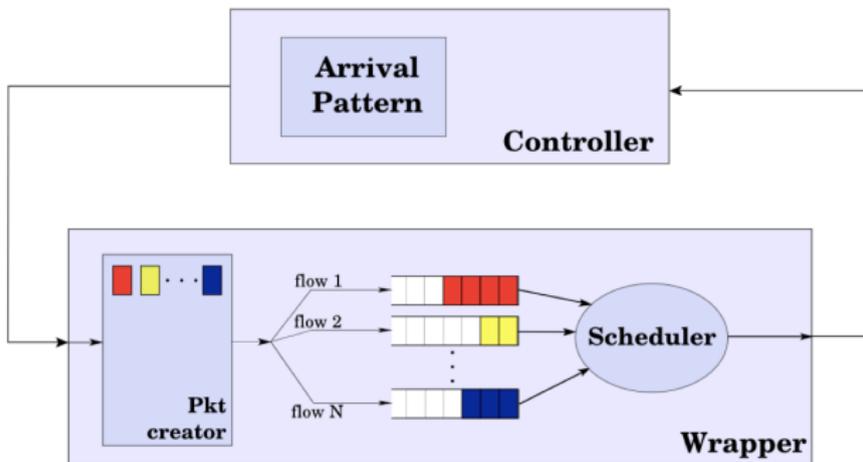

# Test Environment: modular configuration

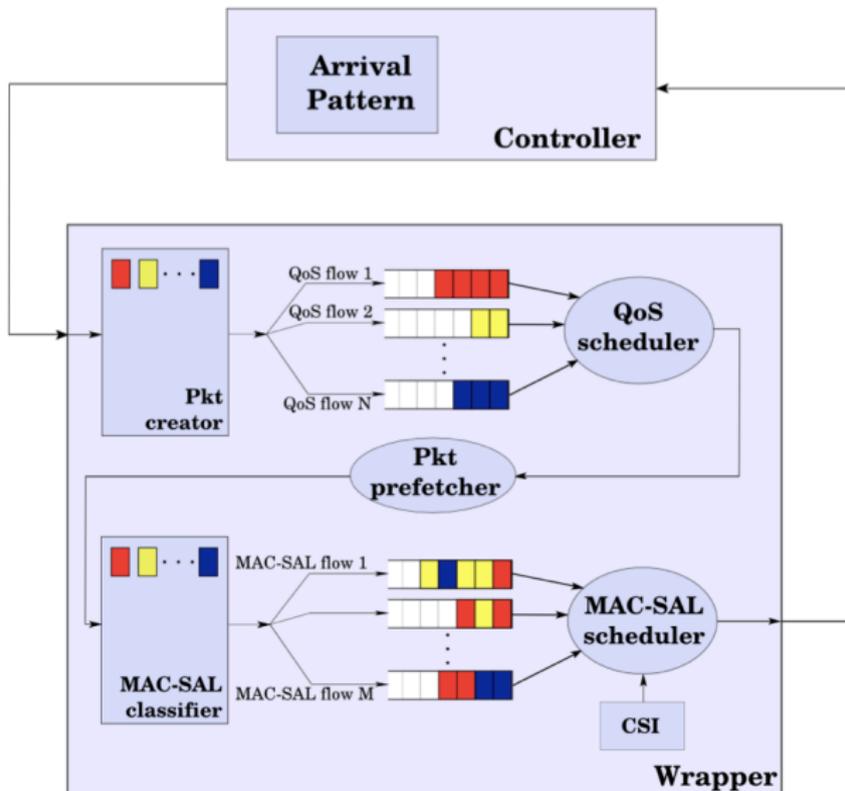


## Reference Scenario

- 20 wireless stations
- link rate 54 Mb/s
- one MAC-SAL flow per wireless station
- MAC-SAL flow packet loss probability
  - ranging linearly from  $10^0$  to  $10^{-1}$
  - outsider values as  $10^{-2}$ ,  $10^{-3}$  and  $10^{-4}$
  - static
- MAC-SAL flow weight distribution
  - analogical:  $\phi_k = (1 - P_{loss_k}) \cdot 1000$
- 100 QoS flows with different weights


# HFS: High-throughput twin Fair Scheduler

QoS layer: quasi-optimal service guarantees, cost close to DRR


MAC-SAL layer: high throughput, quasi-optimal service guarantees, cost close to DRR

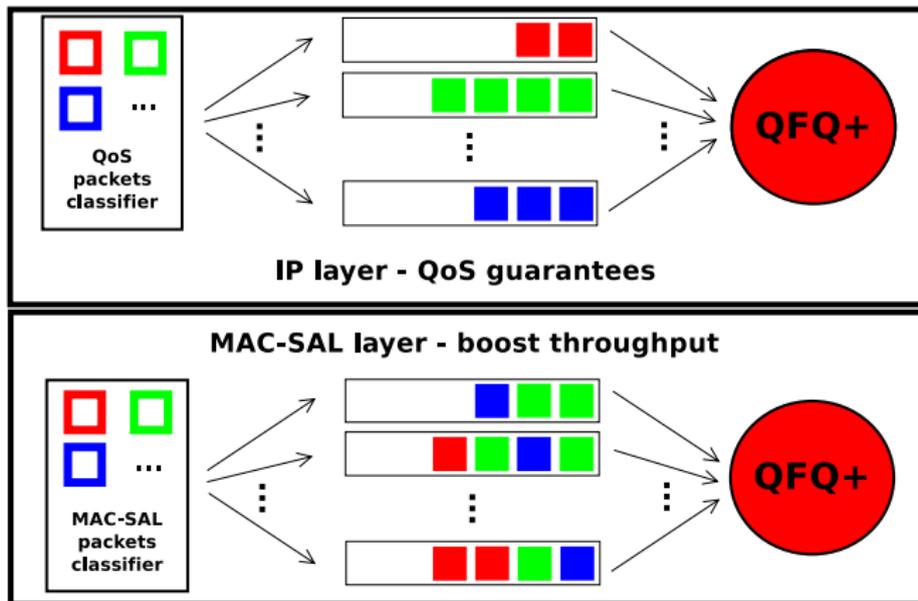



# Throughput of HFS against $W^2F^2Q$

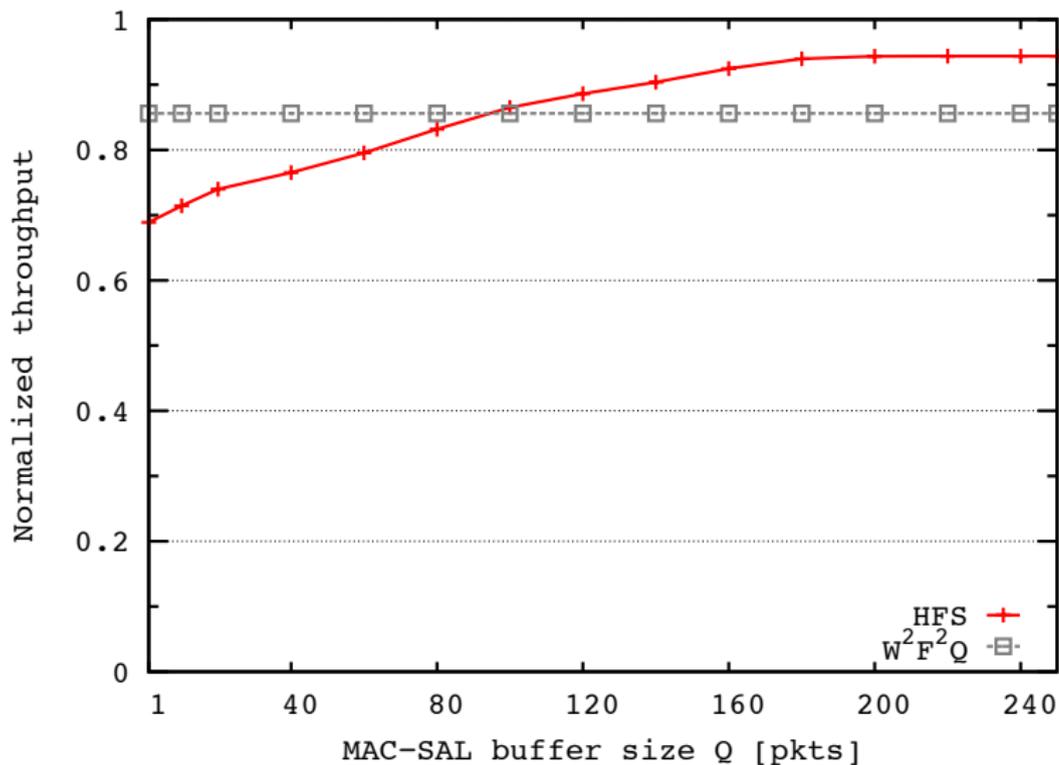

# T-WFI of HFS against $WF^2Q+$ and DRR

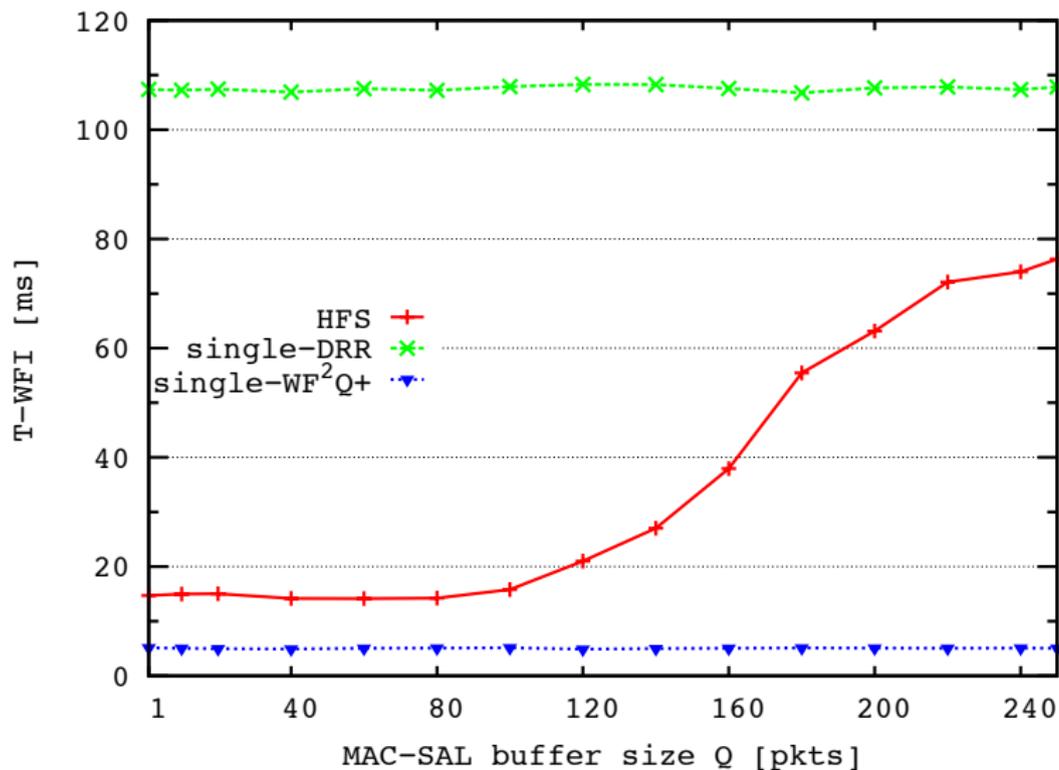


# Tradeoff between QoS guarantees and throughput boosting

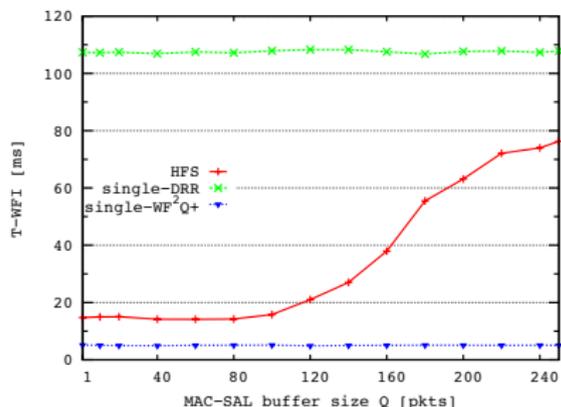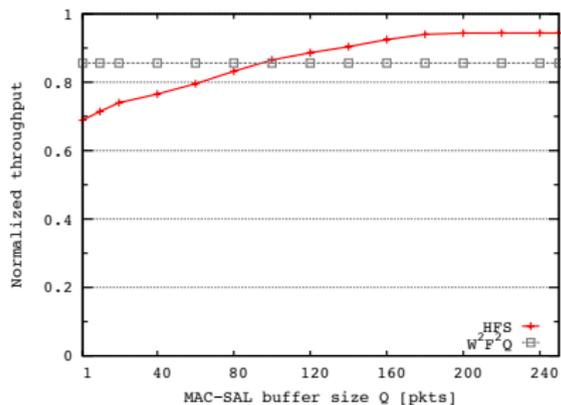

Tunable parameter:

- the higher is Q, the higher is the throughput
- the lower is Q, the higher is QoS guarantees

# Execution time of HFS against DRR

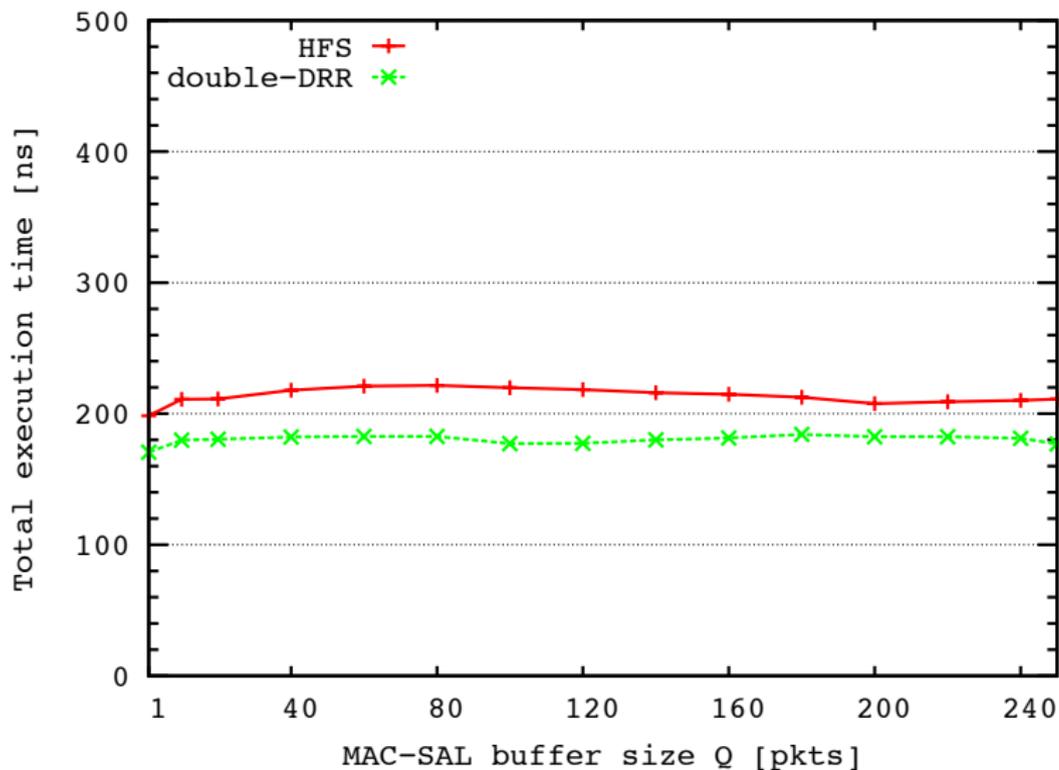

# Conclusions

## Architecture

we defined a feasible, flexible and modular architecture which decouples QoS guarantees and link issues tasks

## HFS

we implemented a new flexible, efficient and green packet scheduler for wireless links

- throughput higher than  $W^2F^2Q$
- T-WFI close to  $WF^2Q+$
- execution time close to DRR
- low energy consumption due to:
  - increase throughput → more packets successfully transmitted per energy consumed → less retransmission → **less power consumption**
  - low execution time per packet processing → **less power consumption**

## Future Works

- benefits for the transport layer (e.g. TCP goodput)
- dynamic weight distribution
- implement and integrate different channel models (e.g. WiMAX, 3G/LTE)

# References

## Conferences:



M. Casoni, A. Paganelli, P. Valente

*A Modular Architecture for QoS Provisioning over Wireless Links.*

PAEWN'13. (2013) 95-100, Barcelona



M. Casoni, C.A. Grazia, P. Valente

*A Flexible and Green Scheduler for providing QoS and High Throughput over Wireless Links.*

ICCST'13. (2013), Hammamet

## Journals submissions:



M. Casoni, C.A. Grazia, P. Valente

*Defining an Effective Wireless-Link Packet Scheduler through a Modular Architecture.*

COMNET. Elsevier



M. Casoni, C.A. Grazia, P. Valente


*TEMPEST: a new Test EnvironMent for Performance Evaluation of the Scheduling of packeTs.*

SIMPAT. Elsevier

thank you  
for the attention

extra slides

# Execution time of HFS against all

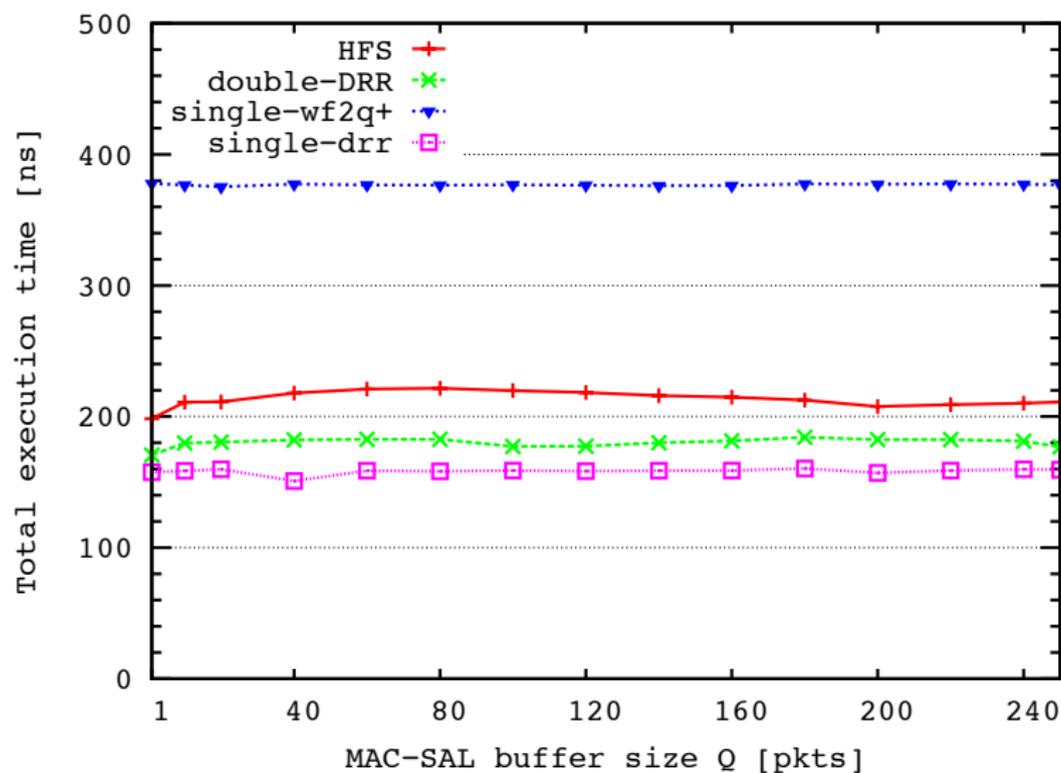


## 1 analytical

- Deficit Round Robin scheduler in MAC-SAL
- weight per-flow proportional to the max possible throughput
- worst-case bandwidth displacement
- MAC-SAL additional delay


## 2 experimental

- proof the effectiveness of the architecture through simulation
- test environment UNIX-based
- different schedulers tested
- different parameters for a possible, realistic scenario

# Normalized throughput for different MAC-SAL schedulers

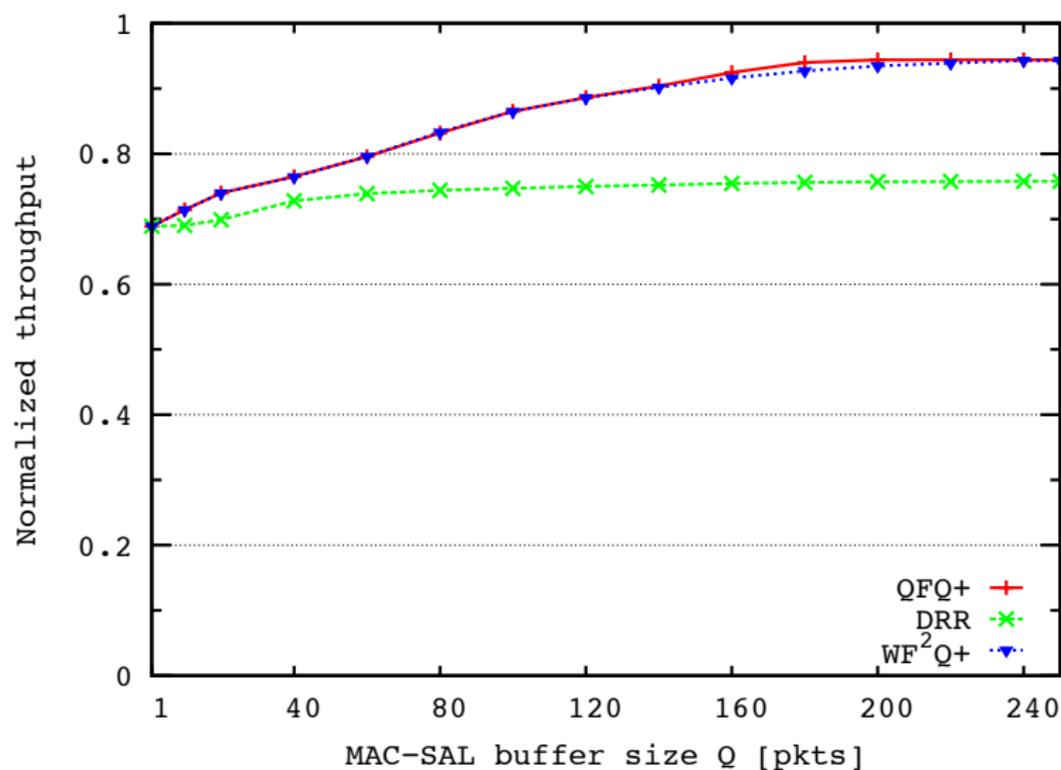

# Queueing delay for different MAC-SAL schedulers

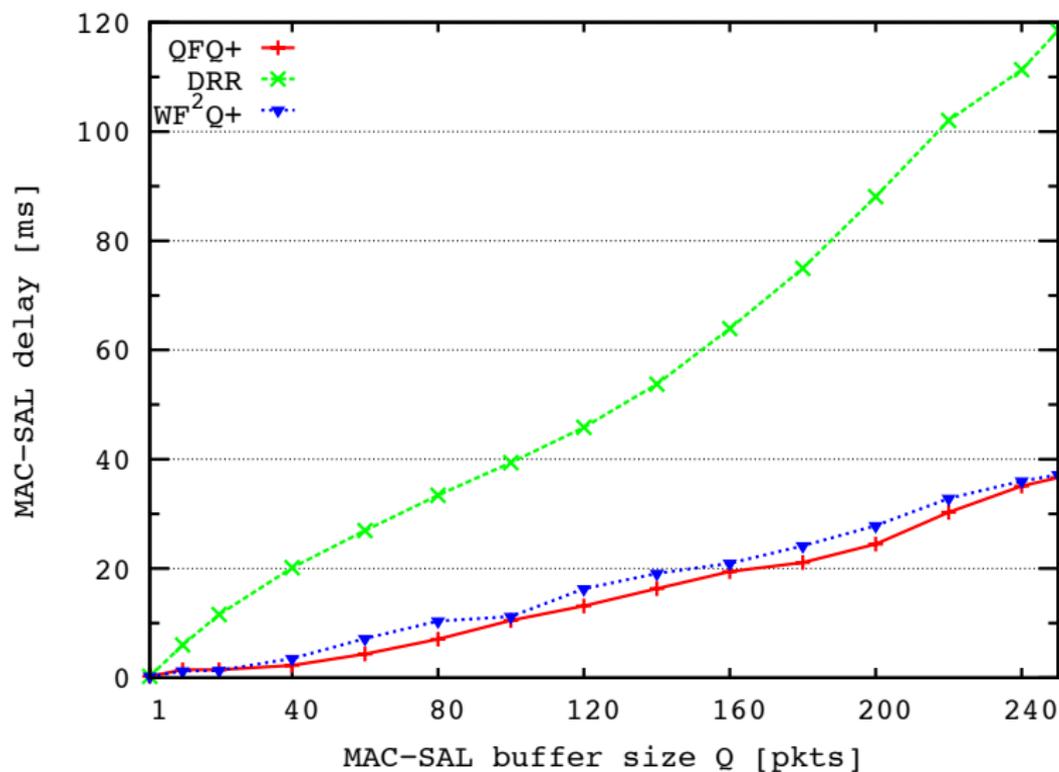

## Execution time for different MAC-SAL schedulers

